

EMC04103025P

Low Noise Preamplifier




Specifications

Frequency Range	400MHz - 10GHz
Gain	33 dB min
P1dB Compression Point	+27 dBm min
Operating Temperature	-20°C to +70°C
Power Requirements	120 Vac or 240 Vac
In / Out Connectors	50 ohm, SMA Female
Size (mm * mm * mm)	217 * 330 * 100
Net Weight	3.2 kg

**Built AC input main power
grounding detect circuit**

	R	Y	Y
OPEN			
GROUND	○	●	○
OPEN			
NEUTRAL	○	○	●
OPEN LINE	○	○	○
LINE/GRD. REVERSE	●	○	●
LINE/NEU. REVERSE	●	●	○
CORRECT	○	●	●
CONTACT SERVICE	●	●	●

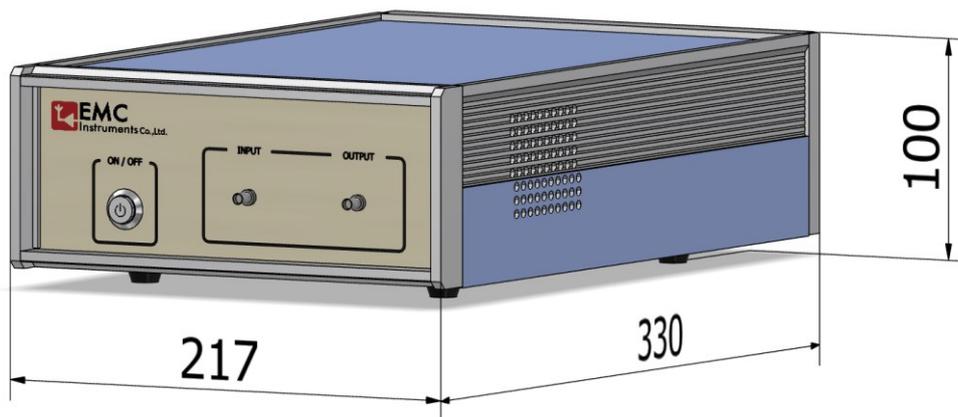

Preamplifier



承儀電子股份有限公司

地址：桃園市龜山區文三三街 38 巷 8 號 1 樓

電話：+886-3-328-6998

傳真：+886-3-328-8376

手機：+886-937-214-592

電子郵件：steven@emci.com.tw

EMC Instruments Corporation

Address: 1F., No. 8, Ln. 38, Wen 33rd St., Guishan Dist., Taoyuan City
333010, Taiwan

TEL: +886-3-328-6998

FAX: +886-3-328-8376

Mobile: +886-937-214-592

E-mail: steven@emci.com.tw

